



Efficiently Moving Grain


## GRAIN BAG UNLOADER

**EX3600**



[www.akron.com.ar](http://www.akron.com.ar)

- **Modern design:** simple versatile operation.
- **Heavily reinforced chassis:** allows an easier unloading operation.
- **Bottom angular gearbox and grain pusher:** simplify the auger's performance and ensure a better end of bag.
- **Independent hydraulic controls.**
- **Hydrostatic movement:** The machine moves automatically as the bag is wound up by the roller. The speed of movement can be adjusted.
- **Single operating and transport position.**
- **Tires:** 235/70 - 15".
- **Electrostatic polyurethane paint.**

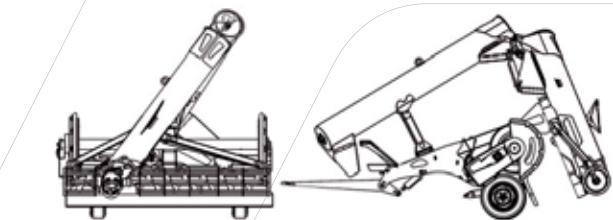

## Great capacity!!! 360 tonnes/hour

**It fully winds up the grain bag.  
Automatic movement independent  
of the tractor traction.**

For bags of	9 feet
Unloading performance	360 tonnes/hour - 13,230 bu/hour
Power required	75 HP
Tube/Auger diameter	400 mm / 15 3/4 in
Horizontal Auger diameter	260 mm / 10 1/4 in

**AKRON** may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.

## EX3600



Sistema de  
Gestión  
ISO 9001:2015  
www.tuv.com  
ID 9108636935



Rosario de Santa Fe 2256  
X2400EFN San Francisco CBA, Argentina  
Tel/Fax: + 54 3564 498502  
export@akron.com.ar  
[www.akron.com.ar](http://www.akron.com.ar)



Height adjustment through  
hydraulic cylinder.



Grain Pusher.  
It ensures a better end of bag.



Independent hydraulic controls.  
Speed Control Valve.



Bag Deflectors.