



Efficiently Moving Grain

GRAIN BAG UNLOADER

EXG300X



www.akron.com.ar

- **Bottom Angular Gearbox.** It simplifies the augers performance and ensures an optimized way of ending the bag.

- **Independent Hydraulic Controls.**

- **Hydrostatic Movement.** The machine moves automatically as the bag is wound up by the roll. It has speed adjustment system and a sturdy reduction gearbox.

- **Tires:** 265/70R16.

- **Electrostatic Polyurethane Paint.**

- **Hydraulic Movable Spout** (optional).

- **Led Running Lights** (optional).



Hydraulic Movable Spout.

Led Running Lights.


Great Capacity!!! 340 tonnes/hour

It fully winds up the grain bag.

Automatic movement independent of the tractor traction.

For bags of	9 or 10 feet
Unloading performance	340 tonnes/hour*
Power required	90 HP
Tube / Auger diameter	430 mm / 16 $\frac{15}{16}$ in
Horizontal Auger diameter	250 mm / 9 $\frac{27}{32}$ in

* measured with corn.

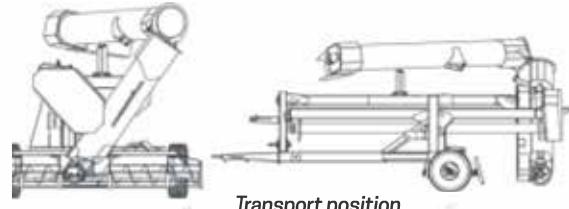

Transport position

EXG 300X



Sistema de Gestión
ISO 9001:2015
www.tuv.com
ID 9108639935



Rosario de Santa Fe 2256
X2400EFN San Francisco CBA, Argentina
Tel/Fax: + 54 3564 498502
export@akron.com.ar
www.akron.com.ar


AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.



Bottom Angular Gearbox.



Grain Pusher
It ensures an optimized way of ending the bag.



Independent Hydraulic Controls. Speed Control Valve.



Roll transmission achieved through a sturdy reduction gearbox and only one chain.



New transmission system.