



Efficiently Moving Grain

SEED AND FERTILIZER CARTS

SFC22000



NEW:
For Air Drill Seeders

www.akron.com.ar

**Discharge capacity:
800 kg/min (wheat)
1000 kg/min (fertilizer)**

- Inner compartments for seed and fertilizers.
- Crank-operated vinyl tarp
- Inner and outer EPOXI coating.
- Toolbox

LOADING AND INOCULATING AUGER, Ø 220 mm

High-capacity pivoting auger.

TWO AUGERS: LOADING AND INOCULATING (optional)

Augers are hydraulically set into transport or working position.

Solenoid Valve Control.
(ON/OFF button).


LOADING AND INOCULATING AUGER FOR AIR DRILL SEEDERS (optional).

Wide range of work, greater height and reach with pivoting spout.

Maximum height with retracted telescoping downspout: 5,30 m.

Maximum height with extended telescoping downspout: 4,40 m.

Loading auger inclined towards the back .
Solenoid Valve Control (ON/OFF button).

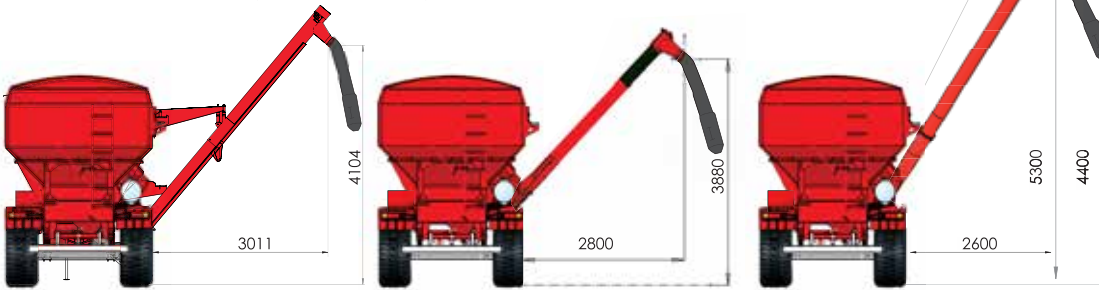

LOADING AND INOCULATING AUGER

TWO AUGERS: LOADING AND INOCULATING

LOADING AND INOCULATING AUGER FOR AIR DRILL SEEDERS

TECHNICAL SPECIFICATIONS

Cargo Volume (L):	22,000
Maximum Loading Capacity (kg)	18,000
Hopper Length (mm):	5,700
Total Length (mm):	7,800
Width (mm):	2,600
Height (mm):	3,400
Curb Weight (kg):	3,800
Hydraulic motor (cm ³):	200
Tires:	Dual tires - high flotation.



Efficiently Moving Grain



Selector valve / Air drill.



Selector valve / Two augers.


SFC22000



Rosario de Santa Fe 2256
X2400EFN San Francisco CBA, Argentina
Tel/Fax: + 54 3564 498502
export@akron.com.ar
www.akron.com.ar



Extra reinforced axles.

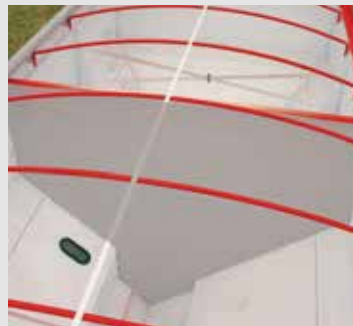

Inner compartments for seed and fertilizers.
Inner and outer epoxy coating.



Water tank.



Inoculant tank.

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.