



Efficiently Moving Grain

# GRAIN BAG UNLOADER

EXG380X



[www.akron.com.ar](http://www.akron.com.ar)



Efficiently Moving Grain

- Newly designed rear transmission features upper and lower angular gearboxes connected by a driveline.
- The cross auger guards are free from structural obstacles to ensure a better grain flow.
- Low-maintenance machine.
- **Bottom Angular Gearbox.** It simplifies the augers performance and ensures an optimized way of ending the bag.
- **Independent Hydraulic Controls.**
- **Hydrostatic Movement.** The machine moves automatically as the bag is wound up by the roll. It has speed adjustment system and a sturdy reduction gearbox.
- **Tires:** 235/70R16.
- **Electrostatic Polyurethane Paint.**
- **Hydraulic Movable Spout** (optional).
- **Led Running Lights** (optional).



Hydraulic Movable Spout.



Led Running Lights.


## Great Capacity!!! 360 tonnes/hour

*It fully winds up the grain bag.*

*Automatic movement independent of the tractor traction.*

For bags of	9 feet (with option to 10 feet)
Unloading performance	340 tonnes/hour*
Power required	90 HP
Tube / Auger diameter	430 mm / 16 <sup>15</sup> / <sub>16</sub> in
Horizontal Auger diameter	250 mm / 9 <sup>27</sup> / <sub>32</sub> in

\* measured with corn.

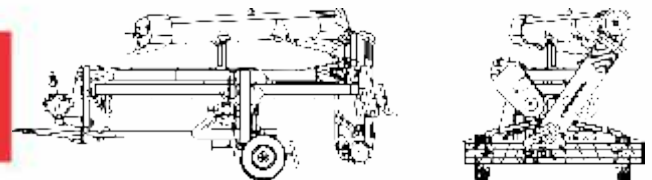

Transport position

**EXG380X**



Rosario de Santa Fe 2256  
X2400EFN San Francisco CBA, Argentina  
Tel/Fax: + 54 3564 498502  
export@akron.com.ar  
[www.akron.com.ar](http://www.akron.com.ar)

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.



Bottom Angular Gearbox.

Grain Pusher  
It ensures an optimized way of ending the bag.

Independent Hydraulic Controls. Speed Control Valve.

Roll transmission achieved through a sturdy reduction gearbox and only one chain.

New transmission system.