



Hall County Government
FINANCIAL SERVICES
PURCHASING DIVISION

Task Order #2026-006

June 30, 2025

POST OFFICE DRAWER 1435
GAINESVILLE, GA 30503

t: 770.535.8270 | f: 770.531.6711

FINANCIAL SERVICES DIRECTOR
Taylor Samples, CPA

ASSISTANT FINANCE DIRECTOR
Elizabeth White

PURCHASING MANAGER
Andy Penick

For the provision of Replace 48" CMP on Windsor Drive

Demand Services for On-Call Public Works Contractors Contract #44-004

PROJECT DESCRIPTION

Hall County, Georgia Board of Commissioners' Public Works Department is issuing this Task Order #2026-006 to Demand Services for On-Call Public Works Contractors to replace an approximately 100-foot-long section of 48" pipe according to the Scope of Work and Georgia Department of Transportation (GDOT) standards.

SCHEDULE OF EVENTS

Release Date: Monday, June 30, 2025

Pre-bid Site Visit: Bidders are welcome to visit the site at their leisure.

Bidder Questions Due Date: Monday, July 7, 2025. Send questions to andrew.youngblood@hallcounty.org.

Response to Bidder Questions Due Date: Tuesday, July 8, 2025

Bid Due Date: Thursday, July 10, 2025, by 2:00pm

Bidders must respond with their Task Order proposals via e-mail to andrew.youngblood@hallcounty.org by 2:00pm EST, Thursday, July 10, 2025. The County's Project Manager is:

Brent Cook, PE PTOE RSP1
Hall County Engineer
Hall County Public Works Department
Office: (770) 531-6800
becook@hallcounty.org

Contract Completion Date

August 15, 2025 with seven (7) days to complete work once construction starts.

Work Hours Restrictions

Work is restricted to the hours of 8:00am – 5:00pm weekdays, and 7:00am – 7:00pm weekends.

SPECIFICATIONS and SCOPE OF WORK:

This project is to replace the failing 48" CMP on Windsor Drive in Flowery Branch. The awarded contractor will be required to remove and dispose of

existing pipe and furnish and install new pipe along with adequate backfill and road paving. Contractor will also be responsible for redirecting a live stream that is on-site.

A pre-bid meeting is not required; however, Contractors are welcome to visit the site individually at their convenience.

Specifications

- Remove and dispose of existing 48" CMP, approximately 100 feet long.
 - Remove and dispose of road millings, existing backfill, etc.
- Furnish and install new 48" pipe approximately 100 feet long. See Pipe Detail below.
- Furnish and install adequate backfill.
 - Assume GAB for backfill material.
- Reuse existing catch basins, if possible.
- Reuse existing headwall, if possible.
- Repave area of disturbance.
 - Final elevation of new pavement shall be flush with existing grade on either side of cut.
 - 4" binder
 - 1-1/2" topping
- Remove and dispose of existing curb and gutter.
- Furnish and install new curb and gutter.

Contractor is to notify Brent Cook, Hall County Engineer, at (7710) 531-6800 to keep him advised of any weather delay days, delays associated to utility facility relocation delays, or other delays in contract time.

Utilities

Hall County has initiated utility locates. The awarded contractor shall be responsible for coordinating and facilitating this task order with the respective utility companies and shall avoid interruption of utilities to the greatest extent possible.

Traffic Control

The awarded Contractor shall provide traffic control to include all items necessary to maintain safe travel for the public. Traffic control shall include, but is not limited to, road closed signs, barricades, detour signs, flagging, work zone signs, low/soft shoulder signs, etc. All traffic control devices and work zones shall comply with the Manual on Uniform Traffic Control Devices (MUTCD), latest edition. All traffic control items shall be maintained by the Contractor at all times throughout the length of the project.

General

All design, detailing, fabrication, construction, and construction vehicles shall conform to the State of Georgia Department of Transportation, Standard Specifications of Transportation Systems, 2021 edition.


The Contractor shall install all required striping as quickly as possible but no longer than 24 hours after the road is completed unless directed otherwise by the project engineer.

Erosion Control – Erosion control measures shall be installed, to the greatest practical extent, prior to construction and should be maintained throughout the construction in accordance with GWSCC requirements. Particular care shall be exercised along stream buffers, wetlands, open waters and other sensitive areas to ensure that these areas are not adversely affected.

Landscaping -- Contractor shall minimize impacts to existing landscaping to the greatest extent practical extent. Removal of median landscaping should be replaced with mulch.

Bidding Information

Hall County reserves the right to delete or add quantities to best serve the interests of the county.

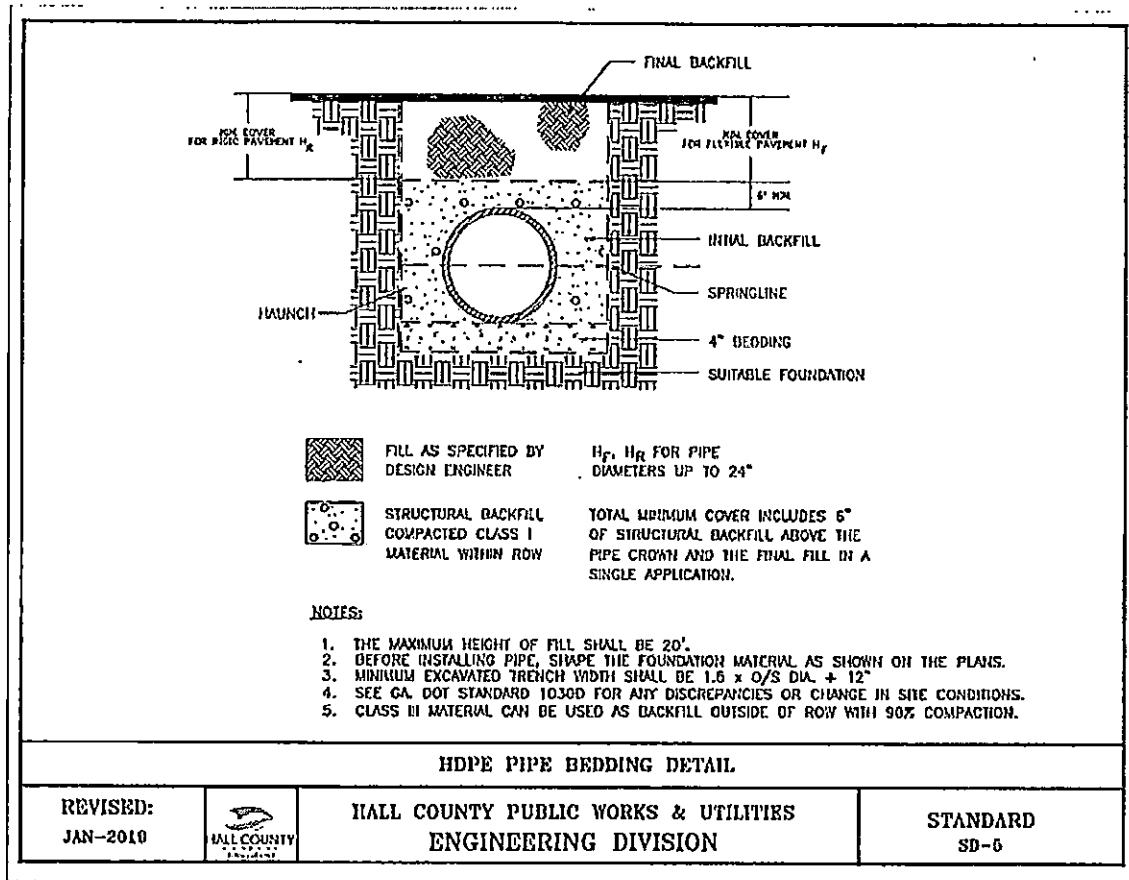

Pipe detail – this figure is labeled for HDPE, but the specifications shall apply to RCP as well.

Lump Sum Bid for HDPE pipe: \$167,060.00

Lump Sum Bid for RCP pipe: \$179,760.00

Option 1: Additional cost for new catch basins: \$7,350.00

Option 2: Additional cost for new headwall: \$4,860.00

Strickland & Sons Pipeline, Inc.
(Full Legal Corporate Name)

By: [Signature]

Title: President

Print Name: Robert F Strickland

Sworn to and subscribed before me this

10 Day of July, 2025.

Notary Public: Jordan S. Wells

Notary commission expires: 3/13/2028


HALL COUNTY, GEORGIA

By: _____

David Gibbs, Chairman
Hall County Board of Commissioners

Date: _____

Attestation: _____
Board of Commissioners Clerk



APPROVED AS TO FORM

[Signature]

Nathaniel R. Anderson,
Senior Assistant County Attorney