

BALL TRANSFER UNITS

PAGE

"SPS" SERIES - LIGHT DUTY TYPE

18-19



Zinc plated pressed metal sheet metal housing and cover*, inner shell in hardened pressed steel*, felt seal**. Balls in chrome steel, AISI420 stainless steel, plastic material.

* Available completely in stainless steel version.

** Except SPS 15 and versions with plastic ball.

"SPP" SERIES - ALL PLASTIC MATERIAL

20-21




Housing and cover in POM (acetal resin) turned from solid, no felt seal to ensure better smoothness, drain hole on the bottom. Plastic or AISI316 stainless steel balls.




All products shown in this catalogue are MADE IN ITALY

"SPS" SERIES – LIGHT DUTY TYPE

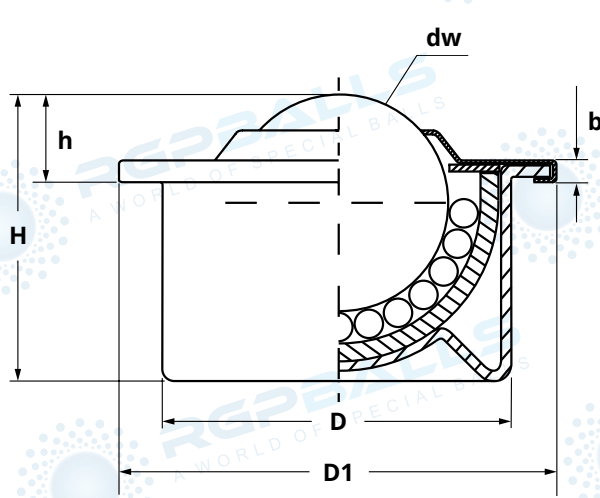

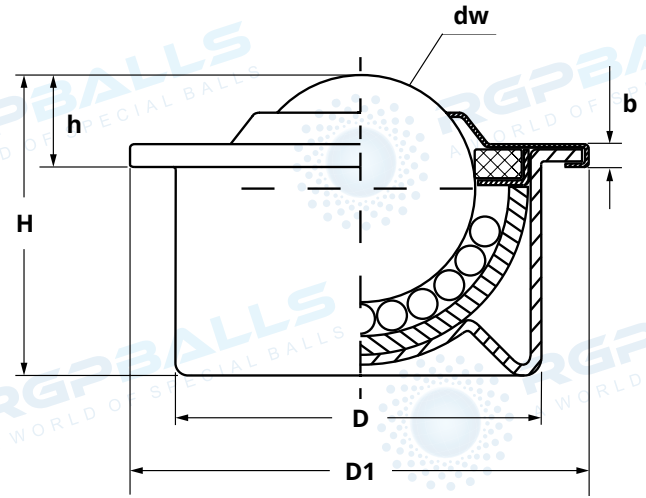

SPS 12/15



SPS 22/30/45

- Dimensionally interchangeable with the SPM version, they guarantee good smoothness and greater lightness at low costs.
- Housing and cover in pressed metal sheet.
- Inner shell in hardened pressed steel.
- Felt seal (except for SPS 12 and 15).

ITEM	TYPE	VERSION	DIMENSIONS						LOAD (Kg)		WEIGHT (Kg)
			dw	D	D1	h	H	b			
SPS01200B	SPS 12 B	Housing in zinc plated pressed metal sheet, inner shell in hardened steel, balls made of chrome steel	12	22 ± 0,08	28	8 ± 0,2	17,2	3	15	15	0,030
SPS01500B	SPS 15 B		15	24 ± 0,08	31	9,5 ± 0,2	21	3	50	35	0,037
SPS02200B	SPS 22 B		22	36 ± 0,08	45	9,8 ± 0,2	29,5	3,5	120	80	0,130
SPS03000B	SPS 30 B		30	45 ± 0,1	55	13,8 ± 0,3	37,8	4	250	170	0,265
SPS04500B	SPS 45 B		45	62 ± 0,15	75	19 ± 0,4	53,5	6	420	300	0,655
SPS01500C	SPS 15 C	Housing in zinc plated pressed metal sheet, inner shell in hardened steel, balls made of stainless steel AISI 420	15	24 ± 0,08	31	9,5 ± 0,2	21	3	35	25	0,037
SPS02200C	SPS 22 C		22	36 ± 0,08	45	9,8 ± 0,2	29,5	3,5	90	60	0,130
SPS03000C	SPS 30 C		30	45 ± 0,1	55	13,8 ± 0,3	37,8	4	140	100	0,265
SPS01500SS	SPS 15 SS	Housing in stainless steel pressed sheet, inner shell in hardened stainless steel, balls made of stainless steel AISI 420	15	24 ± 0,08	31	9,5 ± 0,2	21	3	35	25	0,037
SPS02200SS	SPS 22 SS		22	36 ± 0,08	45	9,8 ± 0,2	29,5	3,5	90	60	0,130
SPS03000SS	SPS 30 SS		30	45 ± 0,1	55	13,8 ± 0,3	37,8	4	140	100	0,265