



Hall County Government

FINANCIAL SERVICES
PURCHASING DIVISION

Task Order #2027-004

July 29, 2026

POST OFFICE DRAWER 1435
GAINESVILLE, GA 30503

t: 770.535.8270 | f: 770.531.6711

FINANCIAL SERVICES DIRECTOR
Taylor Samples, CPA

ASSISTANT FINANCE DIRECTOR
Elizabeth White

PURCHASING MANAGER
Andy Youngblood

For the provision of

FY2027 Resurfacing Program

Demand Services for On-Call Paving & Full Depth Reclamation
Contract #47-004

PROJECT DESCRIPTION

Hall County, Georgia Public Works Department is issuing this Task Order #2027-004 to Demand Services On-Call Paving & Full Depth Reclamation for resurfacing of approximately 30.04 miles of carious Hall County roads according to the Scope of Work and Georgia Department of Transportation (GDOT) standards.

SCHEDULE OF EVENTS

Issue Date: Wednesday, July 29, 2026

Pre-bid Site Visit: Bidders are welcome to visit each site at their leisure.

Bidder Questions Due Date: Wednesday, August 5, 2026

Response to Bidder Questions Due Date: Friday, August 7, 2026

Bid Due Date: Thursday, August 13, 2026, by 2:00pm

Bidding Process: Bidders must respond with their Task Order proposals via e-mail to cbarnes@hallcounty.org by 2:00pm EST Thursday, August 13, 2026. The County's Project Manager is:

Blair Reynolds, Project Engineer
Hall County Public Works Department
Office: (770) 531-6800
breynolds@hallcounty.org

SPECIFICATIONS and SCOPE OF WORK:

This project is for the resurfacing of approximately 30.04 miles of various County roads. The selected contractor will be required to install asphalt pavement as specified in the specifications, and any required striping.

The contractor will be responsible for preparing all roads on the contract. The line item for patching shall include the contractor removing the defective material, disposing of the waste, delivering the asphalt, and installing the new hot mix asphalt. This patching work may be accomplished by milling and inlaying with full depth asphalt or by other means as approved by the project engineer. The locations and the depth of the patching shall be determined by the Project Inspector and the Contractor in the field. The contractor may estimate a depth of 2" of asphalt patch for bidding purposes.

A pre-bid meeting is not required; however, Contractors are welcome to visit each site individually at their leisure. The awarded Contractor will be required to attend a pre-construction meeting scheduled by the Hall County Project Engineer. The awarded Contractor is required to provide, in hard copy and thumb drive format, a construction schedule produced in Microsoft Project at the time of the scheduled pre-construction meeting. All work on this project will be done in compliance with the Georgia Department of Transportation Standard Specifications and Supplemental Specifications.

Schedule

The need for the project to be completed in a timely manner is very important to Hall County. Therefore, the awarded Contractor will be required to immediately mobilize and proceed with construction layout, ordering materials, and construction of the project, unless allowable delays prohibit contractor to work. Be advised, when the contract is awarded by the Hall County Board of Commissioners **the awarded Contractor will be required to complete all work by June 30, 2027.**

Equal time extension will be given if the anticipated awarding date of the contract is delayed. The required completion date is the date that all work is to be completed. Hall County expects the awarded Contractor to begin work within 10 business days of the issuance of a Notice to Proceed and to maintain adequate progress to ensure the contract is completed by completion date. The awarded Contractor must include any anticipated inclement weather days and Holiday days within the allowed contract time. See Attachment "A" for information on inclement weather days. Hall County may consider any unusual number of inclement weather days for time extension.

Contractor is to notify Blair Reynolds, Hall County Project Engineer, at 770-531-6800 to keep him advised of any weather delay days, delays associated with utility facility relocation delays, or other delays in contract time.

Borrow/Waste Area/Disposal

The awarded Contractor shall dispose of any extra material generated by the work. There will not be a separate pay item for disposal. Disposal shall be defined as removing extra material, hauling, and placing it in an approved location. Any borrow material required shall be provided by the contractor and will be paid under the grading complete line item. There will not be a separate pay item for borrow material.

Traffic Control

The awarded Contractor shall provide traffic control to include all items necessary to maintain safe travel for the public. Traffic control shall include, but is not limited to, road closed signs, barricades, detour signs, flagging, work zone signs, low/soft shoulder signs, etc. All traffic control devices and work zones shall comply with the Manual on Uniform Traffic Control Devices (MUTCD), latest edition. All traffic control items shall be maintained by the Contractor at all times throughout the length of the project.

Inspections

Contractor shall schedule and coordinate resurfacing work on all roads with Blair Reynolds, Hall County Project Engineer at 770-531-6800.

A Hall County Engineer or Engineering Inspector will be on-site during the entire resurfacing process for all those projects. Work hours will be Monday through Friday, 8am to 5pm. Please contact the Project Engineer to schedule resurfacing work at least 24 hours in advance.

General

All design, detailing, fabrication, construction, and construction vehicles shall conform to the State of Georgia Department of Transportation, Standard Specifications of Transportation Systems, 2001 edition, unless otherwise noted.

Contractor is required to properly dispose of all removed driveway concrete. No concrete shall be buried within the right-of-way.

Quantities are approximate only. Actual quantities for pay items will be derived by field measurements and weight measurements.

Contractor is to field verify the widths of all roads. Resurfacing shall be over existing asphalt only.

The Contractor shall install all required striping as quickly as possible but no longer than 24 hours after the road is completed unless directed otherwise by the project engineer.

The Contractor is required to construct shoulders on this project.

The Contractor shall be responsible for the installation and maintenance of Low/Soft Shoulder signs. These signs shall be maintained until vegetation is established on the shoulders.

The Contractor shall be responsible for the replacement of any and all Traffic Signal Loops located on this project.

The Contractor shall deliver all millings to the Hall County Landfill located at 1700 Oakbrook Drive, Gainesville, GA 30507.

The Contractor shall utilize Leveling Electronics on the Asphalt Spreader on any roads that are longer than 1 mile in length unless otherwise directed by the Hall County Inspector.

The following roads are the only roads to be considered for crack sealing: Bird Road (Sec.1), Chestatee Road, East Hall Road (Sec. 1), Elrod Road, Gaines Drive, Hog Mountain Road (Sec. 2), Lake Forrest Drive, Lee Street, Looper Lake Road, Old Cornelia Highway (Sec. 3), Ridge Road, Thomas Road and Tribble Gap Road (Sec. 2).

Due to the amount of Commercial Traffic/Activity, Industrial Boulevard (Sec. 1) will need to be planned for Resurfacing at night. A Hall County Inspector will be on-site for this job.

The contractor will have ONE (1) crew only to perform the work on this contract. Multiple crews will NOT be allowed to work during this contract unless circumstances arise and an additional crew is approved by the Project Engineer. There will be NO Subcontractors allowed to perform any paving work on this contract. The Contractor will be required to have its own crew on-site for all paving activities.

Shoulder Construction

Any borrow/waste/disposal areas or borrow material needed as part of this bid item in order to complete shoulder construction is included in the overall bid item. Contractor is required to delineate borrow/waste/disposal areas to the Hall County Project Engineer for her approval. Erosion and Sedimentation Control measures are required on any borrow/waste/disposal areas as part of the overall bid price.

Contractor is to build shoulders on all base and pavement projects as directed by the Project Engineer. Shoulder construction consists of building up the shoulder elevation to match the new pavement elevation, and extending this new built-up material to the point where the shoulder begins to drop off into the ditch or fill slope. This build up is not expected to be greater than six inches in depth. The minimum required shoulder width is 2 feet. Shoulder to drain away from the pavement whenever possible. In the case where the existing shoulder was previously too high, the Contractor will tie in from the new pavement elevation to an appropriate point to provide drainage. Whenever possible, Contractor is expected to extend the shoulder width so as to retain the same shoulder width that occurs due to the higher elevation of the pavement.

Contractor is required to smooth and compact the new shoulder material with clean material that is free from rocky material that could create voids or cause poor turf establishment. Contractor is required to remove all grubbing debris from new shoulder material. Contractor is required to utilize an unerodible soil type so as to minimize repair trips at the contractor's expense.

Contractors are required to sweep new pavement as shoulder construction activities proceed.

The Contractor is to install temporary shoulders as needed to ensure that the elevation difference between the pavement edge and the shoulder is a maximum of two and one half (2 ½) inches or less. Permanent shoulders shall be constructed as soon as possible after the road is completed. Payment for temporary shoulders shall be included in the unit price for shoulder construction. There will be no separate payment for temporary shoulders.

Bidding Information

Hall County reserves the right to delete or add quantities to best serve the interests of the county.

Exhibits and Attachments

Exhibit C – Bid Schedule

Attachment A – Weather Days

Attachment B – FY2027 Road Schedule

Allied Paving Contractors, Inc.
(Full Legal Corporate Name)

HALL COUNTY, GEORGIA

By: 

By: _____

Title: Vice President

David Gibbs, Chairman
Hall County Board of Commissioners

Print Name: Bryan Jones

Date: _____


Sworn to and subscribed before me this

13th Day of Aug, 2026.

Attestation: _____
Commission Clerk

Notary Public: 

Notary commission expires: _____

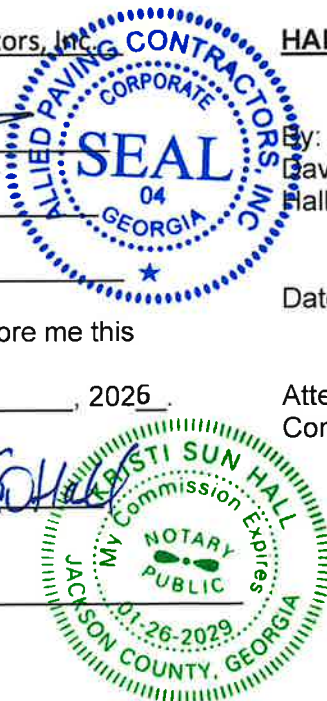

BID SCHEDULE

FY 2027 LOCAL RESURFACING PROGRAM

LINE NO.	GDOT ITEM	ITEM	QUANTITY	UNIT	UNIT AMOUNT	AMOUNT
PAVING AND RESURFACING ITEMS						
0005	318-3800	Aggregate Surface Course	100	TN	\$ 55.00	\$ 5,500.00
0010	402-1812	Recycled Asph Conc Leveling, Incl Bitum Matl & H Lime	13,009	TN	\$ 116.50	\$ 1,515,548.50
0015	402-3100	Recycled Asph Conc 9.5 MM Superpave, Type I, Gp 1 or Blend 1, incl bitum matl & H lime	7,359	TN	\$ 116.50	\$ 857,323.50
0025	402-3103	Recycled Asph Conc 9.5 MM Superpave, Type II, Gp 2 only, incl bitum matl & H lime	20,983	TN	\$ 116.00	\$ 2,434,028.00
0030	402-3130	Recycled Asph Conc 12.5 MM Superpave, Type II, Gp 2 only, incl bitum matl & H lime	12,877	TN	\$ 110.50	\$ 1,422,908.50
0035	413-1000	Bitum, Tack Coat	48,251	GL	\$ 3.50	\$ 168,878.50
0040	432-5010	Mill Asphalt Concrete Pavement, Variable Depth	15,000	SY	\$ 2.50	\$ 37,500.00
0045	441-0016	Driveway Concrete, 6 in thk	100	SY	\$ 44.00	\$ 4,400.00
0050	444-1000	Shoulder Construction	64.27	MI	\$ 3,200.00	\$ 205,664.00
0055	706-1002	Turf Establishment, Tp B	15.58	AC	\$ 2,475.00	\$ 38,560.50
0060		Sawed Joints in Exist Pavement - PCC	100	LF	\$ 1.10	\$ 110.00
0065		Asphalt Patching	36,684	TN	\$ 140.00	\$ 5,135,760.00
0070		Crack Sealing	18.64	MI	\$ 9,705.00	\$ 180,901.20
SIGNING AND MARKING ITEMS						
0075	150-1000	Traffic Control	1.00	LUMPS	\$ 400,000.00	\$ 400,000.00
0080	647-6090	Loop Detector	2.00	EA	\$ 3,850.00	\$ 7,700.00
0085	652-0120	Thermoplastic Type 2 Arrows	45.00	EA	\$ 82.50	\$ 3,712.50
0125	653-0230	Thermoplastic Pvmt Marking, Word, Tp 3A	2.00	EA	\$ 165.00	\$ 330.00
0135	653-1504	Thermoplastic Solid Traffic Stripe, 12 in, White	500.00	LF	\$ 4.95	\$ 2,475.00
0140	653-1704	Thermoplastic Solid Traffic Stripe, 24 in, White	662.04	LF	\$ 9.90	\$ 6,554.20
0145	653-1706	Thermoplastic Solid Traffic Stripe, 24 in, Yellow	200.00	LF	\$ 9.90	\$ 1,980.00
0150	653-1804	Thermoplastic Solid Traffic Stripe, 8 in, White	1,000.00	LF	\$ 3.30	\$ 3,300.00
0155	653-1806	Thermoplastic Solid Traffic Stripe, 8 in, Yellow	1,000.00	LF	\$ 3.30	\$ 3,300.00
0160	653-2501	Thermoplastic Solid Traffic Stripe, 5 in, White	47.06	LM	\$ 2,915.00	\$ 137,179.90
0165	653-2502	Thermoplastic Solid Traffic Stripe, 5 in, Yellow	53.82	LM	\$ 4,395.00	\$ 236,538.90
0170	653-4501	Thermoplastic Skip Traffic Stripe, 5 in, White	1.00	GLM	\$ 1,815.00	\$ 1,815.00
0175	653-4502	Thermoplastic Skip Traffic Stripe, 5 in, Yellow	1.00	GLM	\$ 2,750.00	\$ 2,750.00
0180	657-5019	Thermoplastic Pvmt Marking, Word, Tp 4	2.00	EA	\$ 165.00	\$ 330.00
TOTAL AMOUNT						\$ 12,815,048.20



Hall County Government
FINANCIAL SERVICES
PURCHASING DIVISION

ADDENDUM #1

Response to Bidder Questions

POST OFFICE DRAWER 1435
GAINESVILLE, GA 30503

August 6, 2026

t: 770.535.8270 | f: 770.531.6711

FINANCIAL SERVICES DIRECTOR
Taylor Samples, CPA

ASSISTANT FINANCE DIRECTOR
Elizabeth White

PURCHASING MANAGER
Andy Youngblood

Task Order # 2027-004 FY 2027 Resurfacing Program

1. Will Hall Co require the contractor to utilize a Shuttle Buggy for the placement of the asphalt? If so, please identify the roads that will require a Shuttle Buggy. **Hall County does not require the use of a Shuttle Buggy for the placement of asphalt. However, as stated in the Notes section of the Task Order, Leveling Electronics on the Asphalt Spreader will be required for any roads that are one (1) mile or longer in length.**
2. Could you please provide the roadway dimensions for each of the roads (ideally, lengths and widths would be a tremendous help or SY per Road). **It is the Contractors responsibility to field verify lengths and or widths of the roads on the Task Order.**
3. Will the Contractor be required to pave into adjacent Side Roads? If so, how far? **All side roads and driveways will be properly tied-in to provide a smooth and safe transition. The contractor should estimate side road tie-ins at 10'-20' in order to achieve a smooth tie-in.**
4. Will the Contractor be required to pave into adjacent Driveways? If so, how far? **All side roads and driveways will be properly tied in to provide a smooth and safe transition. Driveway tie-ins will be determined in the field by the Project Inspector.**
5. Will all roads be resurfaced from edge of pavement to edge of pavement, including Turn Lanes? **Please see the "General" section of the Notes page in the Task Order. Turn Lanes will be determined in the field by the Project Inspector.**

6. What is the expected depth for the Leveling? **The Contractor can estimate 55lbs/sq yd for the spread rate.**
7. Can you please identify the roads that might get Leveling? **The Contractor can estimate for all roads to be leveled.**
8. Can you please provide “approximate” Tons of Patching for each road? **Please see the “General” section of the Notes page in the Task Order.**
9. What is the intended use for the Mill Variable Depth? Tie Ins? **This line item covers any driveway/side road tie-ins, etc.**
10. How long can a milled surface remain uncovered with traffic running on it? 7 Days? **Hall County would prefer any milled sections to be covered within the same day unless unforeseen circumstances arise, then the following day would be acceptable. To be determined by the Field Inspector.**
11. Will the Contractor be allowed to utilize Portable Advanced Warning Signs for this work? **Yes.**
12. Will Hall County expect the Contractor to provide Variable Message Boards on any roads? **No.**
13. Will Hall County provide Police to assist with Traffic Control on roads with Traffic Signals? **No.**
14. Are there specific nighttime work hours for Industrial Blvd Sec 1? Or can we work whenever we want? **There will be no specific nighttime work hours except for no weekend work (Mon-Fri only).**
15. Can any of the other roads (other than Industrial Blvd Sec 1) be done at Night? If so, which ones? **Industrial Boulevard Section 1 is the only road that will be resurfaced at Night on this Task Order.**
16. Shoulder Construction Bid Item, is the Quantity of 64.27 MI, Centerline Miles or Individual Shoulder Miles? **The Shoulder Construction Bid Item is for Individual Shoulder Miles.**
17. Will Shoulder Construction apply to all roads on the list? **The Contractor should estimate for all Shoulders to be reconstructed.**

18. Will the Contractor be allowed to place Temporary Pavement Marking Tape on the Leveling Surfaces? Or do you expect the Leveling Surfaces to have Temporary Paint Pavement Markings applied to them? **Temporary Tape may be placed on leveling surfaces for a period of no longer than 48 hours, otherwise Temporary Paint will need to be utilized.**
19. What size Loop Detectors are being put back? **The Contractor can estimate the loop detector size to be approximately 6'x40'.**
20. Can you provide more insight on the boundaries for two roads, Bird Rd Sec 1 and Deaton Rd Sec 2. It is hard to determine where Section 1 ends and Section 2 begins. **Bird Road Section 1 will terminate at the beginning of the curb/gutter for Section 2. Deaton Road Section 2 will begin at the definitive pavement joint located at Section 1.**
21. Can you confirm that the Patching will be done using 19.0mm Asphalt? **The Contractor should use 19mm asphalt for the estimate for the patching line item.**
22. Our assumption is that the bid items for Aggr Surf Crs, Driveway Conc 6in, Sawed Jts PCC, are going to be used on an As Needed basis and there is no known specific scope for these items at this time. **These line items are on an as needed basis and will be determined by the Field Inspector.**
23. Will all Patching be at least the width of a Half Lane Milling Machine? **Yes.**
24. Will a Bid Bond be required for this project? **No, a Bid Bond will not be required for this project.**
25. Will the Contractor be required to pave over the bridge on Old Cornelia Highway approximately 1,056' (ft) North of Cemetery Road? **The area in question is outside the project limits for the portion of Old Cornelia Highway that is on this task order.**
26. Will the Contractor be responsible for any driveways on any of the 37 Roads? **Please refer to Question Number Four (4).**

Acknowledgement: Please sign below that you acknowledge receipt of this Addendum and return it with your bid.

Company Name: Allied Paving Contractors, Inc.

Signature: _____

Print Name: Bryan Jones

Title: Vice President

Date: 8-13-2026

