

Inspector/Date: EM 11/27/18

Permit #: 004 069-3172

Septic Tank: EXISTING 1000

Filter: EXISTING

ATU:

Pump Tank:

Pump:

D-Box:


ATD: 36-48"

Type of Line: ARC-36HC

Total LF: 18 PCS=90'

★ NO FINAL APPROVAL UNTIL
PARKING SPOTS (IN RED) REMOVED
AND VEHICULAR BARRIERS PLACED
IN PARKING LOT TO PROTECT
SYSTEM. ★

SKETCH IS APPROXIMATE
NOT TO SCALE

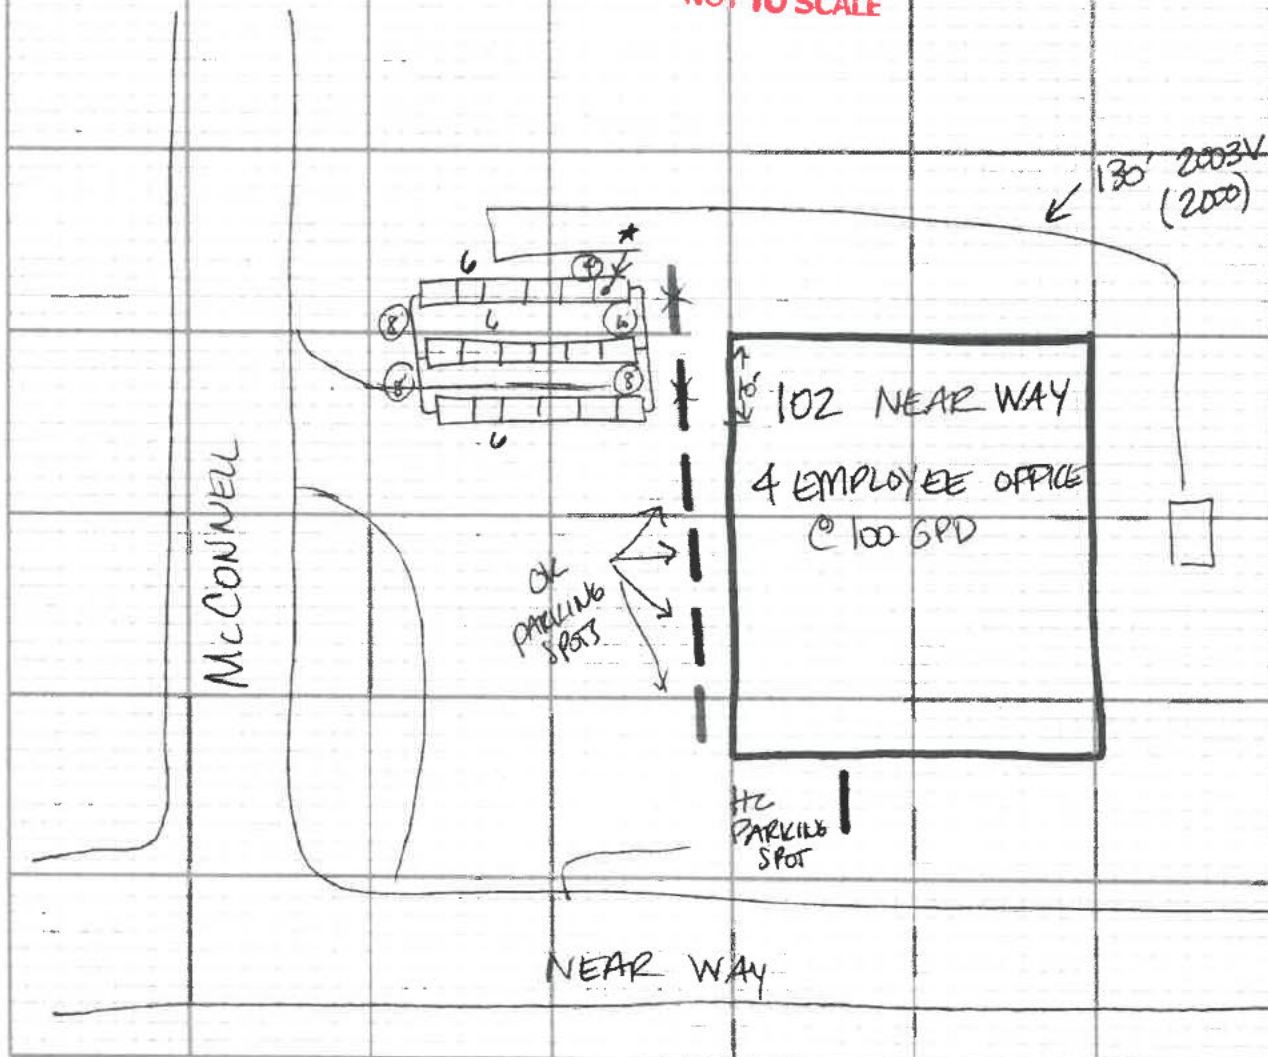

B

C
L
V

HALL COUNTY BOARD OF HEALTH
P.O. BOX 1295, 430 PRIOR STREET GAINESVILLE, GA 30503
APPLICATION FOR CONSTRUCTION PERMIT
FOR ON-SITE SEWAGE MANAGEMENT SYSTEM

Application Date: April 26, 2000

Permit Number: S-069-2000-00996
Property Address: 102 NEAR WAY
GAINESVILLE, GA 30501
Lot Number:
Subdivision:

Builder/Company:
Owner's Name: WALTER SALAZAR
Owner's Address: 1280 INDUSTRIAL BOULEVARD
GAINESVILLE, GA 30501
Phone: 770-287-3959
Fax:

Facility Type: RESIDENCE Water Supply: PUBLIC Plumbing Level: GROUND LEVEL
Lot Size: Garbage Disposal: No Type System:
Bedrooms: 23 Grease Trap: Gals. Field Layout:
Percolation Rate: 31 Water Table: Soil Type:
Absorption Field Area:
Linear Ft: Square Ft: Trench Width: Trench Depth: Septic Tanks: Dosing Tank:
84 252 36 Inches 36 Inches 1600 Gals. Gals.

Directions:
UPDATE FROM 99-1957

Replacement system

Disclaimers:
TRASH/BURIAL PITS MUST BE REPORTED TO THE HEALTH DEPARTMENT.

ALL SURFACE AND/OR GROUND WATER MUST BE DIVERTED AROUND SEWAGE SYSTEM.

THERE MUST BE SUFFICIENT SPACE ON THE PROPERTY TO INSTALL ORIGINAL AND BACKUP CONVENTIONAL ONSITE SEWAGE SYSTEM.

THE ENVIRONMENTAL HEALTH DEPARTMENT WILL BE CHECKING FOR THE NUMBER OF BEDROOMS AND THE WIRING FOR GARBAGE DISPOSALS IN NEW HOMES.

AS OF 2/20/2000 ANY PERSON/PERSON'S INSTALLING ON SITE SEWAGE MANAGEMENT SYSTEMS MUST BE CERTIFIED BY THE STATE OR AN APPROVAL FOR THE SYSTEM WILL NOT BE ISSUED.

WHEN INSTALLING A REPAIR, IF THERE ARE INDICATIONS OF UNSUITABLE SOILS OR OTHER CONCERNS, PLEASE CEASE WORK AND NOTIFY THE HALL COUNTY ENVIRONMENTAL HEALTH DEPARTMENT

Issuance of a construction permit for an on-site sewage management system and subsequent approval of same by representatives of the Georgia Department of Human Resources or County Board of Health shall not be construed as a guarantee that such systems will function satisfactorily for a given period of time, furthermore, said representatives do not by any action in effecting compliance with these rules, assume any liability for damages which are caused, or which may be caused, by the malfunction of such system.

I hereby apply for a construction permit to install an on-site sewage management system and agree that the system will be installed to conform to the requirements of the rules of the Georgia Department of Human Resources, Chapter 290-5-25. I have read and will comply with the additional requirements printed above. I understand that final inspection is required and will notify the County Health Department upon completion of construction and before applying final cover.


W Salazar
Signature(Owner or Applicant)

Patricia L. Lacey
ONLY VALID FOR CONSTRUCTION IF SIGNED
PROPOSED DRAWING IS ATTACHED

53-00-9:38 J. L. Lacey

D

SKETCH IS APPROXIMATE
NOT TO SCALE

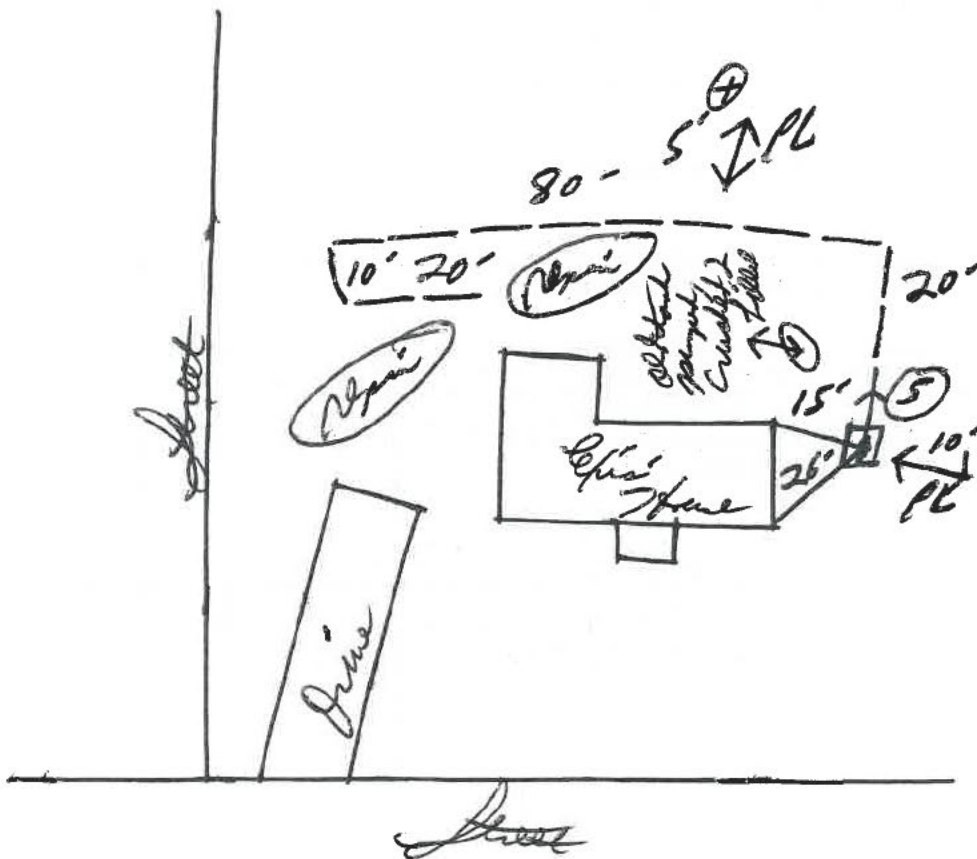

5-3-00
KA
9:30

*Average
Trend
10' 11"
40"-45"

Rip
1000

Polylux
Fiber

Compartment
Tank

80
+20
100
+20
120

30'
E-2 by
2003
V. Smith