SPECIFICATION SUBMITTAL SHEET



Schedule 40 Waste & Overflow - Classic High-flow Half Kit w/Direct Drain Tee and Test Kit


| Job Name: | _ Contractor: |
|---------------|-------------------|
| Job Location: | Approval: |
| Engineer: | Contractor's PO#: |
| Approval: | _ Representative: |

Specification:

Series 2217

"Classic" High-flow Bath Waste & Overflow Half Kit (Less Pipe and Tee) with Direct Tee and Test Kit
Test kit rated up to 4 stories
Brass Strainer 1-1/2 x 11-1/2" Pipe Size and Push eN Lift Closure



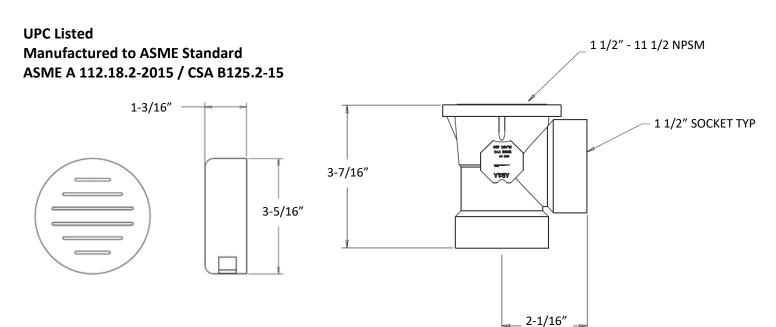

| 1 | Product Code | Description | Model # | Units/Case |
|-----|--------------|-----------------------------------|-------------|------------|
| ABS | | | | |
| | 65502 | ABS Push eN Lift Stopper, Chrome | ABA2227HF | 12 |
| | 65503 | ABS, Touch Toe Stopper, Chrome | ABA2227CSHF | 12 |
| PVC | | | | |
| | 65602 | PVC, Push eN Lift Stopper, Chrome | ABA2228HF | 12 |
| | 65603 | PVC, Touch Toe Stopper, Chrome | ABA2228CSHF | 12 |

