


# SPECIFICATION SUBMITTAL SHEET



## Soft Guard Plus™ Specifications

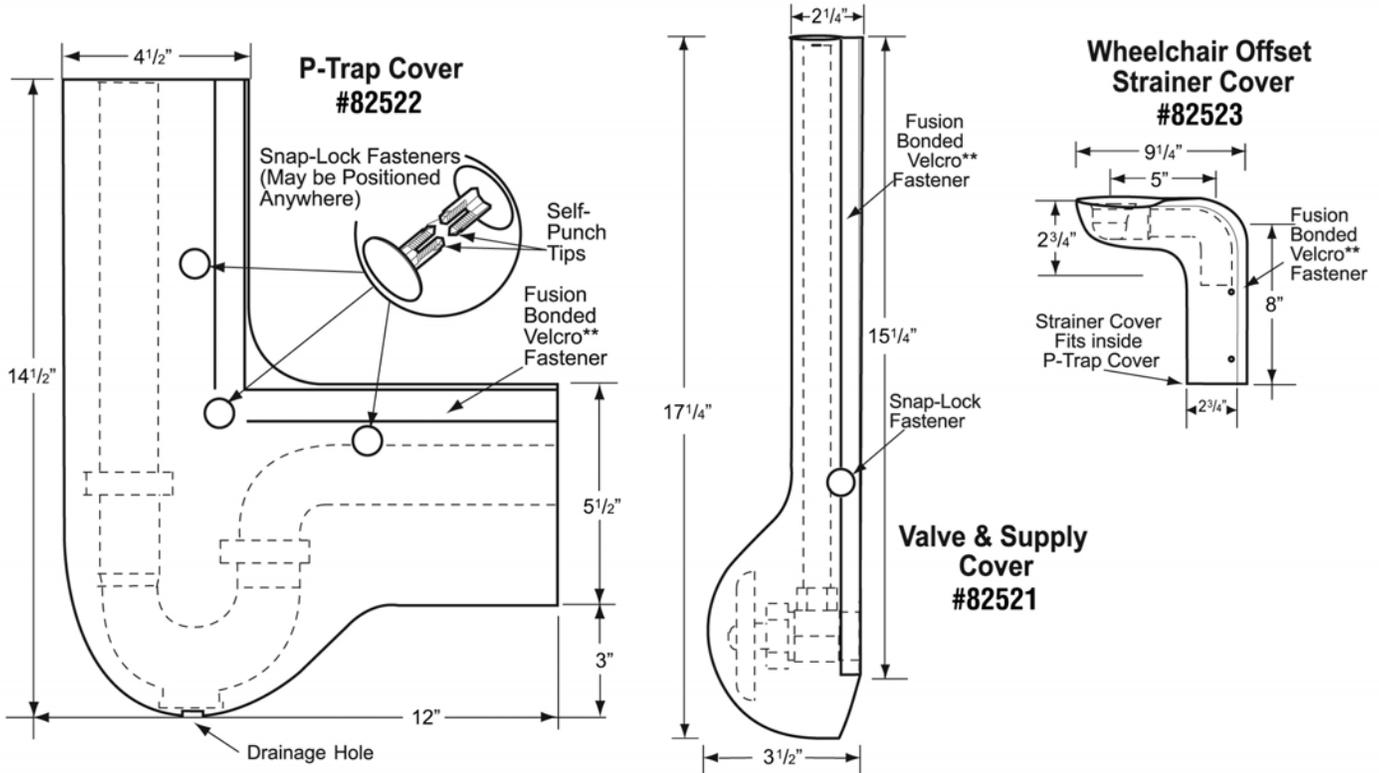

### SPECIFICATION:

Install 1/8" pliable PVC Shell finish Soft Guard Plus on all drainage piping including hot and cold water valve and supplies under lavatories to comply with ADA and UPC standards. Covers shall be secured by joining internal hook and loop fastening system. Furnished custom fit snap-to-lock fasteners may be used for improved tamper resistance. PVC Base Insulation Material complies with 25 Flame Spread/450 Smoke Index.

### COMPLIANCE & TESTING STANDARDS:

ADA 4.19.4, ICC/ANSI A117.1 (sec 606.6). Protects wheel chair users from cuts, burns and abrasions. PVC Base Insulation Material tested in accordance with Testing Standard ASTM E 84-07 with a 25 Flame Spread/450 Smoke Index (not for plenum use).

PRODUCT #	DESCRIPTION
82521	Soft Guard Plus Supply & Valve cover
82522	Soft Guard Plus P-Trap cover
82523	Soft Guard Plus Offset cover
82524	Soft Guard Plus P-Trap & 1 Supply & Valve covers
82525	Soft Guard Plus P-Trap & 2 Supply & Valve covers



[www.ipscorp.com](http://www.ipscorp.com)    [watertite@ipscorp.com](mailto:watertite@ipscorp.com)

500 Distribution Parkway, Collierville, TN 38017, USA ■ TEL: 901-853-5001 ■ WATS: 800-888-8312 ■ FAX: 901-853-5008

