



**STOP FLOOD DAMAGE BEFORE IT EVER STARTS™**

## Transfer Pump

1/2 HP

### Features

- Portable, non-submersible utility/transfer pump
- Multi-purpose pump with high-capacity performance
- Self-priming up to 25'
- Removes water down to 1/16" with suction strainer (not included)
- Constructed of durable, heavy-duty cast iron, with stainless steel motor shaft
- Comes with 3/4" NPT Suction and Discharge size, and 10' power cord



PRODUCT	DESCRIPTION	MODEL
22802	CAST IRON TRANSFER PUMP, 1/2 HP	FSTP50

## APPLICATION


General purpose removal or transfer of clear water

Voltage	115
Amps	7
Hertz	60
Phase	Single
RPM	7000 RPM
Motor Type	Single phase series
Insulation	Class B
Circuit Requirments	7 AMP
Shaft Seal	Mechanical seal
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Air cooled
Motor Protection	Auto reset thermal overload protector

## PUMP SPECIFICATIONS

Discharge Size	3/4"
Suction Size	3/4"
Pump Housing	Cast iron
Pump Base	Cast iron
Impeller Material	Reinforced thermoplastic
Gasket	Rubber
Solids Handling	0" spherical
Liquid Temp. Range	32°-95°F
Fasteners	Steel
Cord Length	10'
Cord Type	SJTW 18AWG/3C, UL list
Maximum Flow Rate	25 GPM
Maximum Head	115'
Max Pressure	50 PSI

## PERFORMANCE

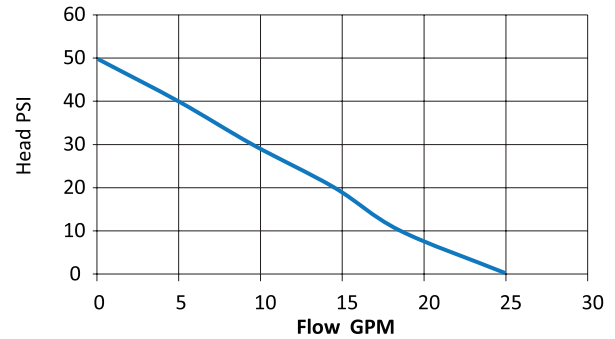

MODEL	HP	DISCHARGE PSI	0	10	20	30	40	MAX DISCHARGE PRESSURE
FSTP50	1/2	GPM	25	18.3	15.0	10.8	6.0	50 PSI
		GPH	1500	1098	900	648	360	

## DIMENSIONS

