

FLOODSTOP®

IPS CORPORATION

STOP FLOOD DAMAGE BEFORE IT EVER STARTS™

Pre-Plumbed Sewage Pump System – 24 x 24 Basin


1/2 HP



System Includes

- 4/10 HP or 1/2 HP cast iron sewage pump with non-clog vortex impeller, tethered float and piggyback plug
- 24 x 24 poly basin
- 2D/2V 18" basin cover (2" threaded discharge flange, 2" threaded vent flange, access port with float pole, dedicated power cord and switch cord grommets)

Basin Dimensions

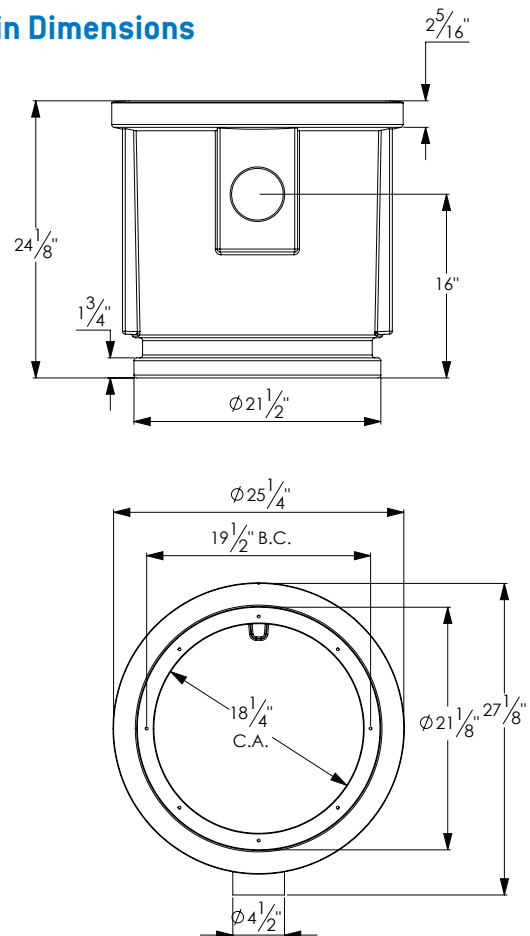

Optional High Water Alarm

[available on 22503 and 22504]

High Water Alarm Features

- Emits an 80 dB audible alarm when the switch is activated
- Low temperature indicator
- Easy-to-use test/silence button located conveniently on front of alarm
- Operates on battery backup during a power outage

PRODUCT	DESCRIPTION	MODEL
22500	24x24 Pre-Plumbed Sewage System, 1/2 HP, Tethered Float Switch, 20' Cords	FSSW50T202424
22501	24x24 Pre-Plumbed Sewage System, 4/10 HP, Tethered Float Switch, 20' Cords	FSSW40T202424
22503	Pre-Plumbed Sewage System, 45 Gal, 1/2HP, Tethered Float Switch, 20' Cords, Alarm	FSSW50T202424A
22504	Pre-Plumbed Sewage System, 45 Gal, 4/10HP, Tethered Float Switch, 20' Cords, Alarm	FSSW40T202424A