



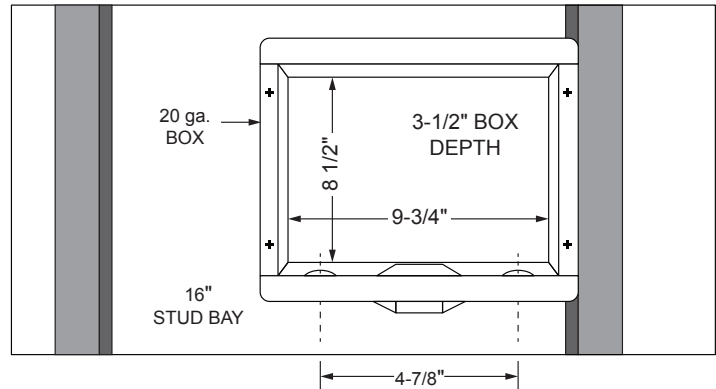


Center Drain Galvanized Washing Machine Outlet Box

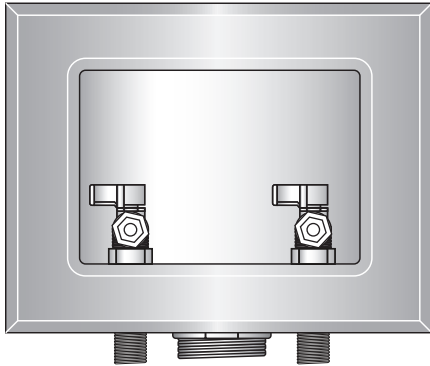

Specifications:

Furnish and install recessed Center Drain Galvanized Washing Machine Outlet Box. Box shall contain valves furnished loose with valve holes punched out in appropriate location as product code checked below. Valves may be quarter turn brass or domestic brass as product code checked below. Hammer Arresters may be pre-installed to the valve that are ASSE Certified to ANSI/ASSE 1010-2004 and conforms to IPC-2006 Standard. Center Drain Outlet w/ 2" Slipnut to be used with 2" Pipe Nipple or male adapter.

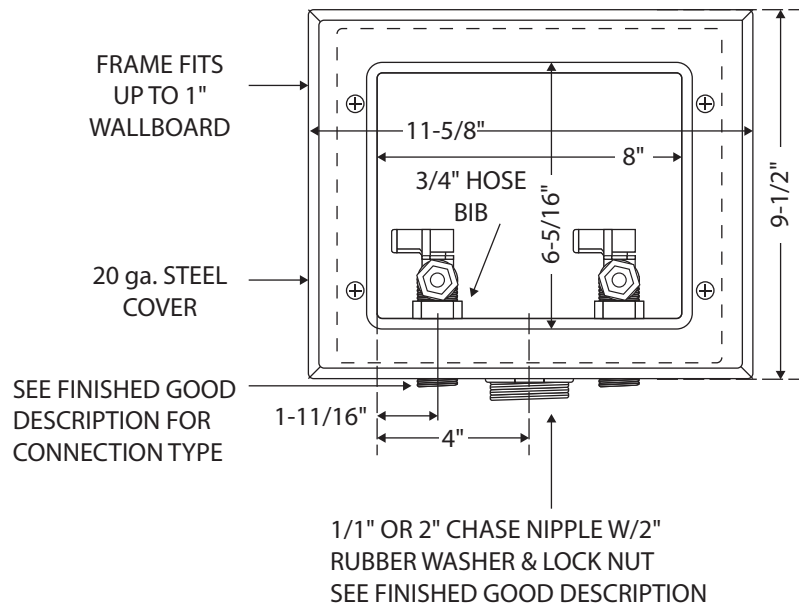

Washing Machine Outlet Box — B150 & B200 Series

LISTINGS	PRODUCT	DESCRIPTION	MODEL	UNITS/CASE
	82026	Qtr-turn Valves, 1/2" MIP/Sweat Conn., 1-1/2" Threaded Drain Fitting	B150	6
	82032	Qtr-turn Valves, 1/2" MIP/Sweat Conn., 2" Threaded Drain Fitting	B200	6
	82036	Qtr-turn Vavles, 1/2" MIP/Sweat Conn. Valves, 2" Threaded Drain Fitting, Top-mount	BB200TS	6
	81974	Qtr-turn Vavles, 1/2" F1807 Conn., 2" Threaded Drain	B200X	6
	81975	Qtr-turn Vavles, 1/2" CPVC Conn., 2" Threaded Drain	B200C	6
	81957	B200 Outlet Box With 2" Threaded Drain Fitting, Less Valves	B200LV	6
	97091	Replacement Faceplate for Models B, BB, WB, FB, & BIM; 20 Ga. Galvanized ¹	B	1



500 Distribution Parkway, Collierville, TN 38017 • Phone: 800-888-8312 • Fax: 901-853-5008 • www.ipscorp.com